Portable Trinocular Metallurgical Microscope



Optional for image unit:
1/3" CCD,
Image capture software & cable.

X-axis dual roller movement unit

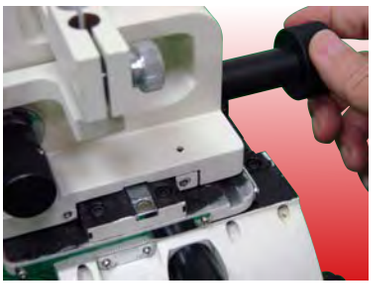

Y-axis slide guide

4 convertible objective lens units

Filter lens & illumination

Standard Module

- Trinocular microscope head with WF 10X/18 eyepiece
- Coaxial illumination cast iron base
- Plain achromatic convertible objective lens unit
- CCD connect unit (CCD optional)
- X-Y-Z cross moveable slide unit
- 6V 20W halogen light intensity adjustable illumination unit
- Focusing coaxial coarse and fine adjustment unit
- X-axis double roller unit, moveable range: no limit, fine adjustment range: 30mm; Y-axis moveable range: 49mm;
- Z-axis focus moveable range: 70mm, fine adjustment range: 1mm.

Model No.	Microscope Magnification	X-Y Travel Range	Objective Lens
OP-PM9000	50X/100X/200X/500X	No limit	5X/10X/20X/50X